

単焦点サポートレンズシリーズ

サポート167

特長

● 遠用エリアとサポートエリアの2つのエリアで眼をサポートするサポートレンズシリーズ。

・ 近くを見る際の調節力を補助し、眼が楽に感じられる

・ 慣れやすくすっきりとした自然な掛け心地で、どのような場面でもご利用頂ける常用レンズ



・ 近くをみる環境が多く、視緊張による眼の疲れや肩・首のこりなどを感じている10代～30代の方におすすめ

- プリズムシニング加工。
- UV吸収剤練り込み素材
- 紫外線UV-A・Bカット

球面	乱視 (-)																			
	0				1				2				3				4			
度数	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0
0.00																				
0.25																				
0.50																				
0.75																				
1.00																				
1.25																				
1.50																				
1.75																				
2.00																				
2.25																				
2.50																				
2.75																				
3.00																				
3.25																				
3.50																				
3.75																				
4.00																				
4.25																				
4.50																				
4.75																				
5.00																				
5.25																				
5.50																				
5.75																				
6.00																				
6.25																				
6.50																				
6.75																				
7.00																				
7.25																				
7.50																				
7.75																				
8.00																				
8.25																				
8.50																				
8.75																				
9.00																				
9.25																				
9.50																				
9.75																				
10.00																				
10.25																				
10.50																				
10.75																				
11.00																				
11.25																				
11.50																				
11.75																				
12.00																				

球面	乱視 (+)																			
	0				1				2				3				4			
度数	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0	2.5	5.0	7.5	10.0
0.00																				
0.25																				
0.50																				
0.75																				
1.00																				
1.25																				
1.50																				
1.75																				
2.00																				
2.25																				
2.50																				
2.75																				
3.00																				
3.25																				
3.50																				
3.75																				
4.00																				
4.25																				
4.50																				
4.75																				
5.00																				
5.25																				
5.50																				
5.75																				
6.00																				

混合乱視 (MX)																度数 ±				
0				1				2				3					4			
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	0.25
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	0.25
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	0.50
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	0.75
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	1.00
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	1.25
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	1.50
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	1.75
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	2.00
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	2.25
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	2.50
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	2.75
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	3.00
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	3.25
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	3.50
0	5	0	5	1	5	0	5	2	5	0	5	3	5	0	5	4	0	5	0	3.75

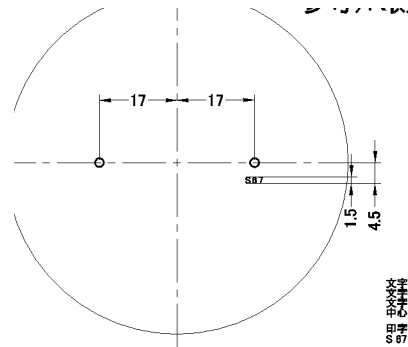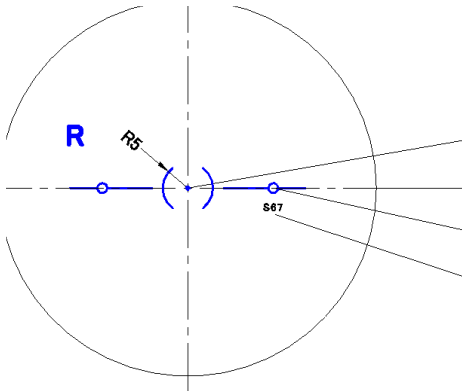

文字書
文字間
文字間
中心
印字寸
S 67

仕様

- 材質 超高屈折プラスチックレンズ
- 屈折率 1.67
- 比重 1.37
- アッペ数 31

特注条件

プリズム	○	0.25△～3.00△まで(0.25とび) スリ残しが出ることがあります。
偏心	×	—
外径指定	○	プラス・ミックスのみ 径小は55mmまで(1mmキザミ)
フチ厚指定	○	—
スレンダー／薄型加工	○	プラス・ミックスのみ
カラー	○	アリアーテ・見本色 受注可 DLCカラー受注可
UVカット	○	標準装備
注意事項		● 遠用度数測定位置で、レンズメーターの十字が出ませんが、中心の点をフィッティングポイントとして加工をお願いします。 ● レンズに上下方向がありますので、ご注意ください。 (「R」Lが書いてある方が上方向です。)